

Compact Module

Features & Benefits

- Shielded design for improved EMI performance
- Suitable for Gigabit Ethernet applications and beyond
- Ultra-slimline design
- Colour coded for quick and accurate termination
- Interchangeable with all other Euro modules and blanks
- Individually QA tested
- Easy to use shield connection

Specifications

Width 25 mm
Depth 22 mm
Height 50 mm
Recommended Back-box Depth 32 mm
Material Polycarbonate/ABS thermoplastic resin, with


grade UL94 VO at 1.5 mm flame retardancy
Finish High gloss
IDC Labels Colour coded labels to T568B
Cable Guide Integrated earth connection/cable tie position
Sockets High performance shielded RJ45

IDC Blocks Industry standard IDC blocks
Conforms to ANSI/TIA-568-C.2 Category 6 Specification

Ordering Information

Product Description Part Number
Cat 6 FTP Compact Euro Module 008-000-001-30



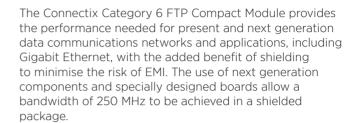

Category 6 compact modules can be fitted into single or dual gang Euro faceplates and can be combined with quarter blanks and/or voice modules to provide the required configuration.

The compact design provides one of the shallowest wall outlets on the market; making them the ideal solution wherever back-box depth is a problem.

The modules are fully compliant with the ANSI/TIA Category 6 standards. When used in conjunction with Connectix Category 6 FTP Patch Panels and FTP Cable the user will get a link performance exceeding Category 6 requirements.



